



## Our Brands Ensure Premium Quality, Safety, and Reliability

Below are the part of Our Brand

**head rush**  
technologies

**IMMOOS**



**CLiC-it**

**PETZL®**

**KRATOS**  
SAFETY  
SOLUTIONS FOR LIFE



[www.hpsplayco.com](http://www.hpsplayco.com)

# HEADRUSH TECHNOLOGIES



## TRUBLUE iQ Auto Belay

DIMENSIONS	iQ: 370 x 280 x 198 mm (14.5 x 11 x 7.7 in) iQ+: 370 x 280 x 254mm (14.5 x 11 x 10 in)
WEIGHT	iQ LT: 15.9 kg (35 lbs), iQ XL: 19 kg (41 lbs) iQ+ LT: 19 kg (41.8 lbs), iQ+ XL: 22.1 kg (48.7 lbs)
CLIMBER WEIGHT RANGE	0-140 kg (22-309 lbs)
MAXIMUM LANDING VELOCITY	2.0 m/s (6.5 ft/s)
MAXIMUM MOUNTING HEIGHT	LT: 12.5 m (41 ft) XL: 20 m (65.6ft)
MINIMUM MOUNTING HEIGHT	LT: 4.5 m (14.8 ft) XL: 12 m (39.4 ft)
TEMPERATURE RANGE	Operating: -4°C to 60°C (25°F to 140°F) Operating (Dry): -10°C to 60°C (14°F to 140°F)



## TRUBLUE SPEED Auto Belay

SPECIFICATIONS	
RATED BODY WEIGHT	10 to 136 kg (22 to 300 lbs)
DEVICE WEIGHT	18.5 kg (41 lbs)
MAXIMUM MOUNTING HEIGHT	16 m (52.8 ft)
MINIMUM MOUNTING HEIGHT	7.5 m (24.6 ft)
MAXIMUM DESCENT RATE	2.0 m/s (6.6 ft/s)
TEMPERATURE RANGE	Operating: -4°C to 60°C (25°F to 140°F) Operating (Dry): -10°C to 60°C (14°F to 140°F)



## zipSTOP Zip Line Brake

SPECIFICATIONS	
RATED WORKING CAPACITY	15 to 150 kg (33 to 330 lbs)
MODEL NUMBER	ZS125-08
WARRANTY	1 year
LINE SPECIFICATIONS	Maximum Line Extension: 12.5m
DEVICE WEIGHT	23.5 kg (52 lbs)
RATED WORKING VELOCITY	0 to 36 kph (4 to 22 mph) utilizing a direct 1:1 load 0 to 60 kph (6 to 37 mph) utilizing a 2:1 reduction line* <small>*Higher rated working velocities require that the zipSTOP device be utilized in conjunction with a reduction line assembly. The specifications noted are valid only when installed as part of that system</small>

# HEADRUSH TECHNOLOGIES



## zipBACK

Dimensions	380 x 320 x 216 mm (15 x 12.6 x 8.5 in)
Weight	15kg (33lbs)



## QuickFlight Free Fall Device

Specifications	
Dimensions	80 x 320 x 216 mm (15 x 12.6 x 8.5 in)
Weight	25 kg (55 lbs)
Rated Working Capacity	20 to 130 kg (44 to 285 lbs)
Warranty (all devices)	9.5 mm $\leq \phi \leq$ 13 mm (3/8 in $\leq \phi \leq$ 1/2 in) Standard Practice for Design of Amusement Rides and Devices



## LightSpeed Micro Trolley

Specifications	
Dimensions	123 mm (4.8 in)
Weight	364 grams (0.8 lb)
Rated Working Capacity	15-150 kg (33-330 lbs)
Cable Line Diameter	9.5 mm $\leq \phi \leq$ 13 mm (3/8 in $\leq \phi \leq$ 1/2 in)



## LightSpeed EZ Clip Trolley

Specifications	
Dimensions	145 mm (5.7 in)
Weight	507 grams (1.1 lb)
Rated Working Capacity	15-150 kg (33-330 lbs)
Cable Line Diameter	9.5 mm $\leq \phi \leq$ 13 mm (3/8 in $\leq \phi \leq$ 1/2 in)

# HEADRUSH TECHNOLOGIES



## LightSpeed Impact Zip Line Trolley

SPECIFICATIONS	Model IT-100 (the standard Impact Trolley)
DIMENSIONS	7.1 x 4.4 x 1.3 in (180 x 111 x 33 mm)
NET WEIGHT	1.2 lbs (544 grams)
WORKING TEMPERATURES	Minimum: -40°C/-40° F
MAXIMUM	80°C/176°F
MAXIMUM OPERATING SPEED	75 mph (120 kph)
MATERIALS: HOUSING	Anodized Aluminium Sheaves: Stainless Steel
IMPACT SURFACE	ABS Plastic
RATED WORKING CAPACITY	33-330 lbs (15-150 kg)
MAXIMUM LOAD RATING	17 kN (3,822 lbf)
MIN/MAX CABLE DIAMETER	9.5 ≤ Dia ≤ 19 mm (3/8" ≤ Dia ≤ 3/4")

# IMMOOS



## Immoos Cable carriage SS1 mGB

ROPE DIAMETER	12 – 60 mm
ROPE INCLINATION	105 %
MASS	54 x 36 x 21 cm
WEIGHT	ca. 7 kg
MAX. SPEED	approx. 1.8 m/s
SERVICE LOAD (V ≠ 0)	25 kg (1,25 kN)
SERVICE LOAD (V = 0)	250 kg (2.5 kN)

# MSAL



## MARK Robin Hub

STANDARD	ANSI Z359.4:2013, EN 12841 Type C, EN 1496:2017-B, EN 341:2011-1A
CAPACITY	225 kg (2 Persons)
DESCENT SPEED	approx. 1 m/s (regardless of the load)
MAX. ABSEILING HEIGHT	500 m
MATERIAL	Aluminium, Steel
BRAKING SYSTEM	automatic redundant braking system, 2 centrifugal brakes, steel brake drums
CARABINER	Automatic AHK aluminium carabiner (others on request)
ROPE	MARK kernmantle rope ø 9,6mm according to EN 1891-A (EN 341, EN 1496, ANSI Z359.4), Rope ø 9,6mm to ø 11mm according to EN 1891-A (EN 12841)
INSPECTION INTERVAL	10,000 m or 1x per year (when stored in MARK Infini Box the inspection is only required every 10 years)
DURATION OF USE	Device unlimited, rope max. 10 year
APPLICATIONS	Cable cars, Climbing gardens, etc., Professional rescue from heights by industrial climbers or fire brigades from high workplaces



## MARK Descent

STANDARD	AANSI Z359.4:2013, EN 341:2011-1A
CAPACITY	150 kg (1 person)
DESCENT SPEED	approx. 1 m/s (regardless of the load)
MAX. ABSEILING HEIGHT	300 m
MATERIAL	Aluminium, Steel
BRAKING SYSTEM	automatic redundant braking system, 2 centrifugal brakes, steel brake drums
CARABINER	Automatic AHK aluminium carabiner (others on request)
ROPE	MARK kernmantle rope ø 9,6mm according to EN 1891-A (EN 341, EN 1496, ANSI Z359.4)
INSPECTION INTERVAL	10,000 m or 1x per year (when stored in MARK Infini Box the inspection is only required every 10 years)
DURATION OF USE	Device unlimited, rope max. 10 year

# MSAL



## MARK Robin

STANDARD	ANSI Z359.4:2013, EN 341:2011-1A
CAPACITY	225 kg (2 Persons)
DESCENT SPEED	approx. 1 m/s (regardless of the load)
MAX. ABSEILING HEIGHT	500 m
MATERIAL	Aluminium, Steel
BRAKING SYSTEM	automatic redundant braking system, 2 centrifugal brakes, steel brake drums
CARABINER	Automatic AHK aluminium carabiner (others on request)
ROPE	MARK kernmantle rope ø 9,6mm according to EN 1891-A (EN 341, EN 1496, ANSI Z359.4), Rope ø 9,6mm to ø 11mm according to EN 1891-A (EN 12841)
INSPECTION INTERVAL	10,000 m or 1x per year (when stored in MARK Infini Box the inspection is only required every 10 years)
DURATION OF USE	Device unlimited, rope max. 10 year

# CLIC-IT




## Click-it Adventure lanyard

A4 (recommended for kids)

A 110cm L1 63cm L2 73cm

# CLIC-IT

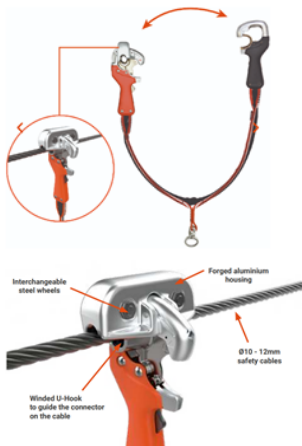

## Click-it ZIP

A4x25 ZiP

A 110cm L2 73cm L1 63cm



## CLiC-it RIDER

Reference

DAS436

Weight

534g

# PETZL



## PCCHU - Petzl Helmet

REFERENCES	A049AA00	A049AA01
COLOR(S)	Blue	Violet
WEIGHT	300 g	300 g
HEAD CIRCUMFERENCE MIN.	48 cm	48 cm
HEAD CIRCUMFERENCE MAX.	54 cm	54 cm
GUARANTEE	3 years	3 years
INNER PACK COUNT	1	1

# PETZL



## OUISTITI- Petzl Harness for kids

REFERENCES	C068AA00
COLOR(S)	Methyl Blue
GUARANTEE	3 years
INNER PACK COUNT	1



## SIMBA CLIMBING - Petzl Harness for kids

REFERENCES	C065BA00	C065BA01
INNER PACK COUNT	Sold individually	Sold in a pack of 5



## MACCHU - CLIMBING - Petzl Harness for kids

REFERENCES	C015AA00	C015AA01
COLOR(S)	Blue	Violet
GUARANTEE	3 years	3 years
INNER PACK COUNT	1	1



## AVAO - CLIMBING - Petzl Harness

REFERENCES	C079AB00	C079AB01	C079AB02	C079AB03
COLOR(S)	Black, Yellow	Black, Yellow	Black	Black
SIZE	1	2	1	2
WAIST BELT	70-93 cm	83-120 cm	70-93 cm	83-120 cm
LEG LOOPS	47-62 cm	50-65 cm	47-62 cm	50-65 cm
WEIGHT	1100 g	1200 g	1100 g	1200 g
GUARANTEE	3 years	3 years	3 years	3 years
INNER PACK COUNT	1	1	1	1



# PETZL



## ASTRO – CLIMBING – Petzl Harness

REFERENCES	C085AA00	C085AA01	C085AA02
COLOR(S)	Black/Yellow	Black/Yellow	Black/Yellow
SIZE	0	1	2
WAIST BELT	65-80 cm	70-93 cm	83-120 cm
LEG LOOPS	44-59 cm	47-62 cm	50-65 cm
WEIGHT	1135 g	1150 g	1165 g
GUARANTEE	3 years	3 years	3 years
INNER PACK COUNT	1	1	1



## BOREO – Petzl Helmet

REFERENCES	A042UB00	A042UB01
COLOR(S)	Orange	White
SIZE	S/M	M/L
WEIGHT	300 g	325 g
HEAD CIRCUMFERENCE	48-58 cm	53-61 cm
GUARANTEE	3 years	3 years
INNER PACK COUNT	1	1

# KRATOS SAFETY



## Kratos Harness – FLY'IN 4

FLY'IN 4	Work positioning sit-harness
ADAPTABILITY	djustable thigh-straps and waist belt.
CONVENIENCE	S - M
MAX. USER WEIGHT	140 kg
ATTACHMENT ELEMENTS	2 lateral metallic D-Rings for work positioning, 1 dorsal D-Ring, 1 front ventral attachment (metallic D-Ring) for rope access.
CONVENIENCE	Thigh straps are provided with automatic buckles & waist strap has combination buckles or easy adjustment. 3 extra bigger handles at the back for keeping extra karabiners and accessories. This sit work positioning belt is particularly adapted for a work in restraint thanks to the dorsal D-Ring and for all the rope access interventions.

# KRATOS SAFETY



## Kratos Harness – SPEED-AIR 4

<b>SPEED-AIR 4</b>	Full body harness 2 attachment points with rotative belt
<b>ATTACHMENT ELEMENTS</b>	2 big size chest attachment textile loops (2 x A/2), 1 dorsal D-Ring for fall arrest, 2 lateral D-Rings for work positioning. With an extension strap attached on the dorsal D-Ring at one end and one loop at the other side.
<b>ADAPTABILITY</b>	Adjustable chest strap, shoulders, thigh-straps and waist belt.
<b>SIZE</b>	L , XXL
<b>CONVENIENCE</b>	Shoulder straps have combination buckles. Chest strap, thigh-straps, waist strap are provided with automatic buckles for easy adjustment. Can be used by a user with a maximum weight of 140 kg.



## Kratos Helmet

Ratchet headband, suitable for head circumferences from 52 to 61 cm. Slots for visor fitting (visor ref. no. HP 10 200 01), small hooks for headlamp, side slots for hearing protection fitting (accessories not included).

# EURO-MATIC



## Ball Cleaning Machine

<b>DIAMETER</b>	120 mm
<b>WEIGHT</b>	60000.00 g
<b>COLOR</b>	black and yellow
<b>MATERIAL</b>	HDPE
<b>MAIN FEATURES</b>	
<ul style="list-style-type: none"><li>• Able to clean up to 15,000 balls per hour</li><li>• Capable of bagging up to 50,000 balls per hour</li><li>• Designed to fit through a standard doorway</li><li>• Lightweight and mobile</li><li>• Built to Industrial standards for reliability and endurance</li><li>• unique ball sanitation system</li><li>• Supplied with 5m hose, 25 netsacks, 2 towels and detergent</li><li>• Standard brushes suitable for 75mm balls but 60mm or 80mm available</li></ul>	



**FOR MORE INQUIRIES, PLEASE CONTACT US AT**

✉ **[Sales@hpsplayco.com](mailto:Sales@hpsplayco.com)**

© 2024, Hpsplayco. All rights reserved.  
Terms & Conditions | Privacy Policy & GDPR  
🌐 [www.hpsplayco.com](http://www.hpsplayco.com)